

# YONGNUO



## YN660LED 使用说明书 User Manual

### 前言

感谢您使用YN660LED摄像灯，在使用产品前，请认真阅读使用说明书。


### 注意事项

- 严禁将产品靠近或者投入火源，以避免发生火灾及爆炸等危险。
- 请勿私自拆卸产品，如产品出现故障须本公司或授权维修人员处理。
- 请勿在易燃易爆和暴露在雨中使用。

### 产品规格

光源	672颗灯珠与120颗RGB贴片灯			
色温	2000K-9900K和RGB全彩			
输出功率	45W			
照度	距离	0.3M	0.5M	1M
	灯珠	1510Lux	864Lux	3213Lux
	R	2272Lux	1246Lux	436Lux
	G	4733Lux	2599Lux	897Lux
	B	1289Lux	698Lux	248Lux
重量	约2400克			
外接电池	两个NP-F系列电池			
外接电源	DC 12V5A			
体积	820*150*105毫米			
遥控距离	小于15米			
平均寿命	50000小时			
光照角度	55°和110°			
所含物品：摄像灯（1）、收纳包（1）、格栅（1）、柔光布（1）说明书（1）。				
注：如有缺失请与经销商联系。				

## 产品结构

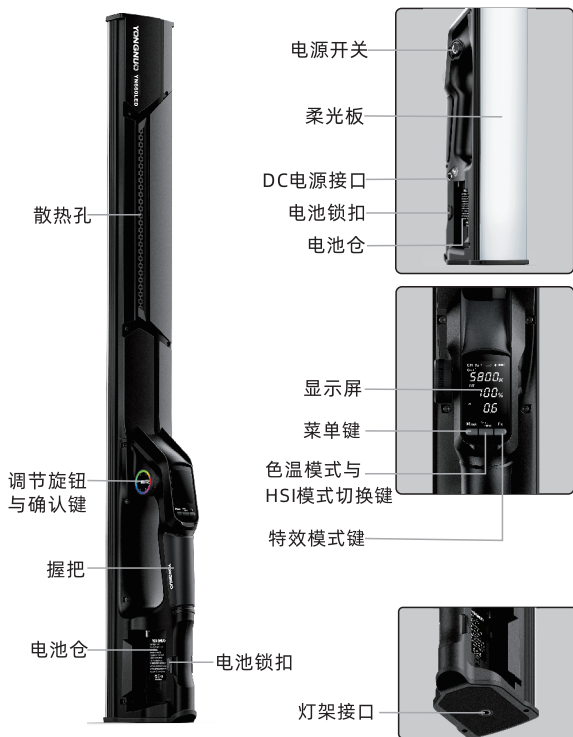

-2-

## 安装与使用

### 1.1使用电池供电


请按箭头方向安装NP-F系列电池使用，取下请按下电池锁扣。须同时安装两个NP-F系列电池才能点亮使用。



### 1.2使用DC电源供电



请使用输出为DC-12V5A电源适配器。



## 2、开机与关机。


拨动电源开关进行开机机。



-3-


### 3、色温与亮度设置。

按下<Tem>按键进入色温模式，按下确认键切换色温与亮度调节选项，旋转调节设置参数；长按确认键进入偏红、偏绿调节，旋转调节设置参数。

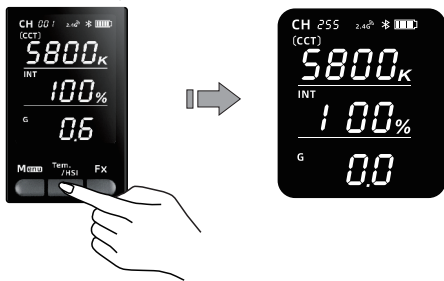


### 4、HSI设置。

按下<HSI>按键进入HSI模式，按下确认键切换H:相位调节选项；S:饱和度调节选项；I:亮度调节选项，旋转调节设置参数。

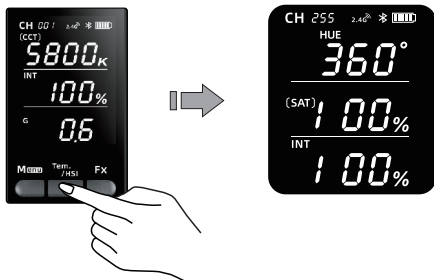


### 5、切换频道。

按下<Menu>按键进入设置界面，选择频道[CH]菜单，按下确认键旋转旋钮调节到您所需要的频道；再次按下确认键完成切换。（注：产品分为256个频道）

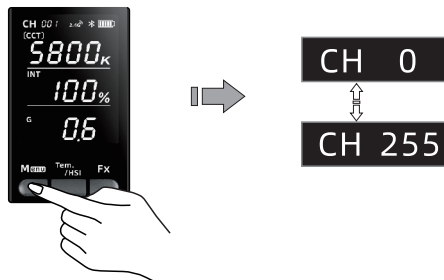

### 6、特效模式。

按<FX>进入特效模式，短按确认键切换模式、速度、亮度设置，旋转调节参数；再次按下<FX>按键暂停。

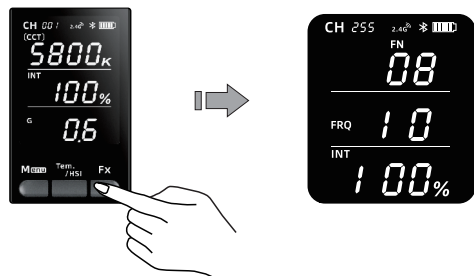





## 7、格栅的使用。

- 1), 用魔术贴将柔光布与格栅组合。
- 2), 将摄像机装入格栅中, 用魔术贴将灯与格栅固定。

用魔术贴将柔光布与格栅组合



魔术贴

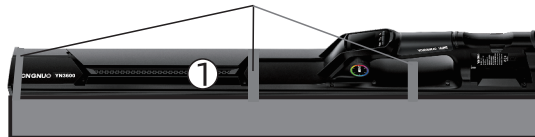

## 8、手机APP与遥控器的使用。

1) .按下<Menu>按键旋转调节旋钮选择蓝牙<📶>,按下确认键开启蓝牙；此时打开手机APP就可以自动连接摄像灯实现无线控制。

2) .2.4G无线控制模式可选择关闭。

3) .APP可以从永诺官网下载或通过扫描彩盒二维码点击下载。



蓝牙 OFF



蓝牙 ON



2.4G OFF



2.4G ON

本手册中的功能是依据本公司的测试条件获得，设计和规格如有变更，恕不另行通知。

深圳市永诺摄影器材股份有限公司

地址：深圳市坪山区坑梓街道深福保现代光学厂区A座

电话：（86）0755-83762448

传真：（86）0755-83762765

网址：[www.hkyongnuo.com](http://www.hkyongnuo.com)

生产地址：深圳市坪山新区坑梓街道锦绣中路14号

深福保现代光学厂区A栋厂房

售后电话：400-001-3888

## Introduction

Thank you for using YN360Mini LED video light. Please read the manual carefully before you use it.


## Precautions

- Do not put the product close to or throw it into the fire source to avoid the danger of fire and explosion.
- Do not disassemble the product, maintenance or repair of this product should be handled by technical maintenance personal of our company or authorized technical maintenance personal .
- Do not use this product in flammable and explosive place, or where it can be exposed to moisture.

## Product specification

Color temperature version	672 LED beads and 120 RGB SMD lamps			
Light Source	2000K-9900K and RGB full color			
Output power	45W			
100% illumination	Distance	0.3M	0.5M	1M
	LED	15101Lux	8647Lux	3213Lux
	R	2272Lux	1246Lux	436Lux
	G	4733Lux	2599Lux	897Lux
	B	1289Lux	698Lux	248Lux
Weight	Approx 2400g			
Compatible batteries	Two NP-F series batteries			
External power source	DC 12V5A			
Size	820*150*105MM			
Control distance	<15M			
Average Service Life	50000H			
Luminance Angle	55° and 110°			
Contents: Video light*1, Grate*1, Soft light cloth *1, Storage bag*1, User manu*1.				
Note: Please contact your dealer if anything missing.				

## Product structure

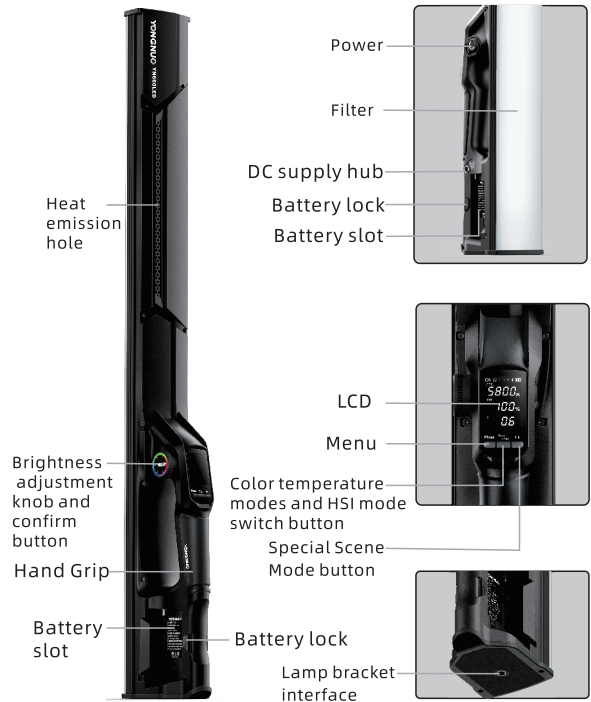



## Installation and use

### 1.1 Use batteries power supply.

Please install the NP-F series batteries in the direction of the arrow, and please press the battery lock when removing the batteries.



### 1.2 Use DC power for power supply.




Please use the power adapter with output of DC-12V5A.

### 2. Power on and off

Toggle the Power ON&OFF button to switch the product on and off.




3. Color temperature and brightness adjustment  
Press the button <Tem> to enter the color temperature mode, press the confirm button to switch the color temperature and brightness adjustment options, and turn the knob to adjust parameters; long press the confirm button (to) enter the reddish and greenish adjustment function, and turn the knob to adjust parameters.

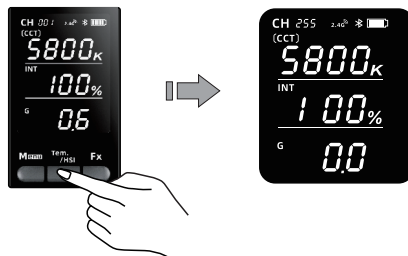


### 4. HSI adjustment mode

Press the button <HSI> to enter the HSI mode, and press the OK button to switch to H: phase adjustment option; S: saturation adjustment option; I: brightness adjustment option, and turn the knob to adjust parameters.

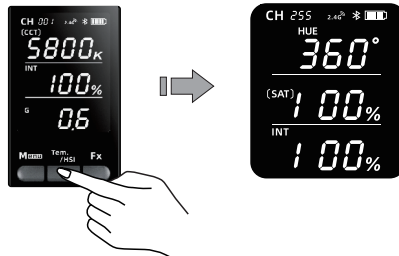



## 5. Switch channels

Press the button <Menu> and toggle the confirm button to select the channel [CH] menu, then turn the knob to adjust the channel you want; press OK to complete the switch. (Note: The product provides 256 channels.)

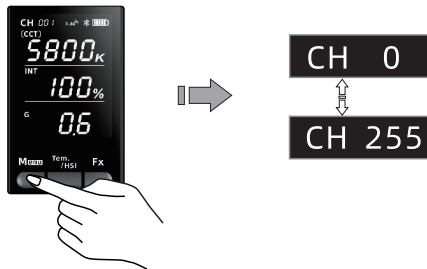

## 6. Special scene modes

Press the button <FX> to enter the special scene modes, short and turn the knob to switch between modes; press the confirm button to enter the special scene modes, press confirm button again to pause.

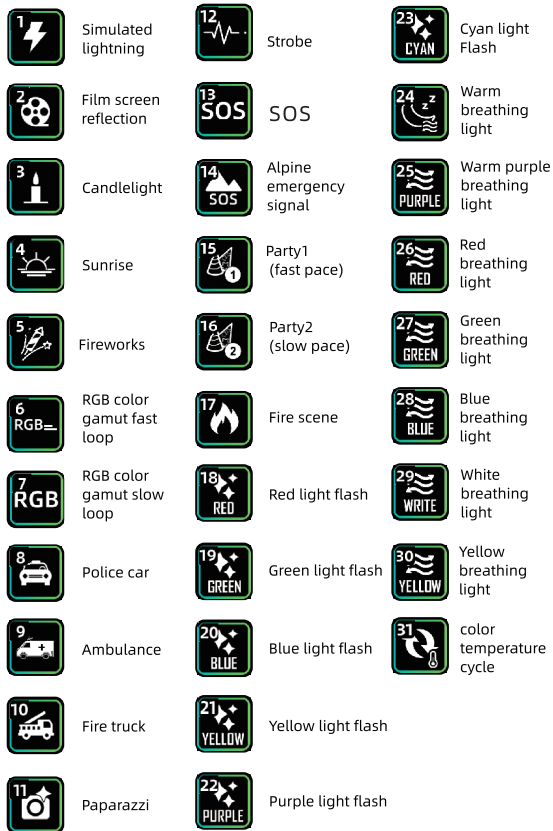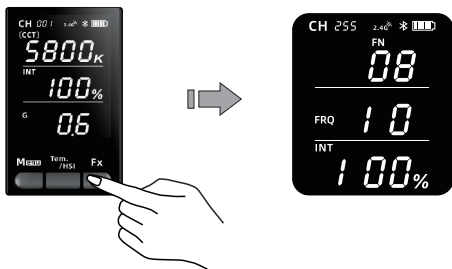





## 7.The use of grid and soft light cloth

- 1) .Use magic stickers to make the soft cloth stuck around the grid.
- 2) .Install the video light from the middle of the grid,and use the rubber band to fix the video light and the grid.


Use magic stickers to stick the soft cloth together.



Magic sticker

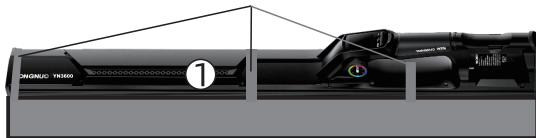

## 8.Use via mobile APP and remote control for wireless control

- 1).Press the menu button  and toggle the OK button to select bluetooth,press OK button to turn on bluetooth; open the mobile APP ,at this time the video light is connected automatically to realize wireless control.
- 2).ON or OFF of 2.4G Wireless Control Mode.
- 3)The APP can be downloaded from the YONGNUO official website or scanning the QR code on the gift box.



Bluetooth off



Bluetooth on



2.4G off



2.4G on

The functions in this manual are based on the test conditions our company.Further notice will not be given if the design and specifications change.